



**Features:**

- 4 Digit, 7 segment LED
- 0.01 Resolution

Size: 72mm x 72mm

Certifications: **CE**

**Technical Specifications**

**Display**

Display	7 segment LED Display
Digit	4
Digit Height	0.56" (14.2mm)

**Input Specifications**

Electrical Connection	1Ø - 2 wire
Input Voltage Range	Self Powered
Measurement Range	45.00 - 65.00 Hz
Resolution	0.01
Accuracy	± 0.05 Hz
Over Range Indication	"Ovfr" (Over 65.00 Hz)
Under Range Indication	"Ur" (Under 45.00 Hz)

**Supply Specifications**

Auxiliary Supply	240V AC ±20%, (45 - 65Hz)
------------------	---------------------------


**Environmental Specifications**

Temperature	Operating: 0 to 50°C (32 to 122°F) Storage: 0 to 70°C (32 to 158°F)
Humidity (non-condensing)	Upto 85% RH


**Mechanical Specifications**

Mounting	Panel mount
Weight	190 gms
Protection Level	IP65 for faceplate

**Dimensions**

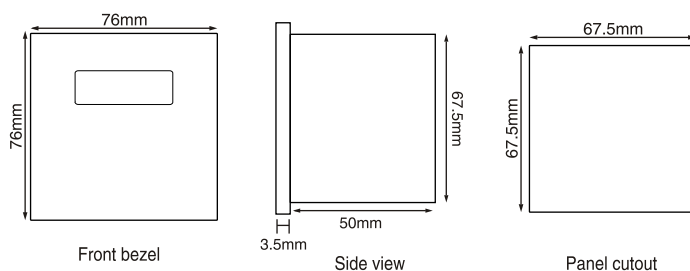

**Terminal Connections**

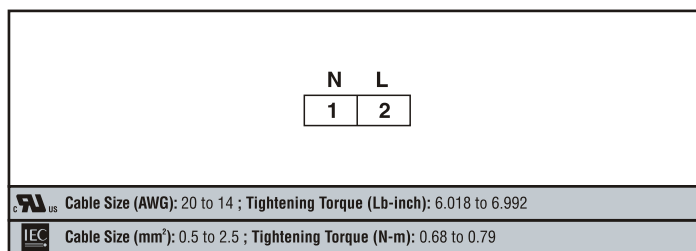

**Ordering Information**

Part No.	Supply Voltage
	240V AC
MF216	■