

KT 170/171 NEW

VOLTAGE TESTER

Probe Protection Cover



CE

CE

photo : KT170


photo : KT171

- Comply with the latest standards IEC61243 and IEC61010
- Novel design
Large and bright LEDs: Values are visible in the dark place.
Ergonomic design fits in the hand.
- Two functions are available in one model.
"Measurement without battery" and "Self Test (all LED on)"
- Test leads withstand harsh environments at low temperature.
- Penlight (white LED)
- Auto-power ON / OFF
- Audible indication
- Variable test tips, $\phi 2\text{mm}$ or $\phi 4\text{mm}$
- Probe protection cover can store the attachment of caps.
- IP65 (IEC60529)


KT170/171	
Voltage test	
Voltage range	12~690V AC/DC
LED	
Nominal voltage	12/24/50/120/230/400/690V AC(16~400Hz), DC(\pm)
Tolerance (Threshold voltage)	Light on at more than: 7 \pm 3V (12V LED) 18 \pm 3V (24V LED) 37.5 \pm 4V (50V LED) 75% \pm 5% of nominal voltage (120/230/400/690V LED)
Response time	< 0.6s at 100% of each nominal voltage
LCD (KT171 only)	
Range / Resolution (Auto-range)	300V AC/DC (6.0~299.9) / 0.1V 690V AC (270~759) / 1V 690V DC (270~710) / 1V
Accuracy (23 \pm 5 $^{\circ}$ C)	\pm 1.5V (7~100V) \pm 1% \pm 5dgt (100~690V) AC(16~400Hz), DC(\pm)
Over limit indication	"OL"
Response time	< 2s at 90% of each voltage
Peak current	Is<3.5mA (at 690V)
Measurement Duty	30s ON (operation time) 240s OFF (recovery time)
Single-pole phase test	
Voltage range	100~690V AC (50/60Hz)
Phase rotation test	
System	Three-phase 4-wire system 200~690V phase-to-phase AC (50/60Hz)
Phase range	120 \pm 5 degree
Continuity test	
Detection range	0~400k Ω + 50%
Test current	Approx. 1.5 μ A (battery 3V, 0 Ω)
Operating temperature and humidity ranges	-15~55 $^{\circ}$ C, max 85% RH (No condensation)
Storage temperature and humidity ranges	-20~70 $^{\circ}$ C, max 85% RH (No condensation)
Applicable standards	IEC61243-3, IEC61010-1, IEC61010-031, IEC61557-7 CAT. III 690V / CAT. IV 600V Pollution degree 2, IEC60529 (IP65)
Power source	LR03(AAA) 1.5V x 2
Dimensions	246 x 64 x 26mm
Weight	195g (including batteries)
Accessories	LR03(AAA) 1.5V x 2, KTA01(4mm metal tips[2pcs/set]), KTA02(4mm rubber caps[2pcs/set]), Instruction manual

KT170AU is available for Australia and New Zealand market.

Variable top tips



Store the attachment of caps

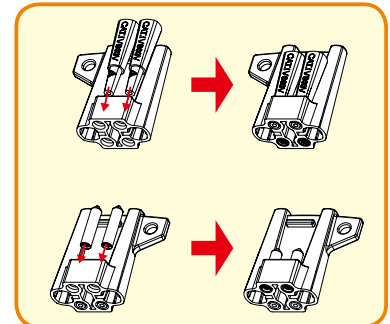

Voltage Test (Double-pole Test)

- The voltage is indicated by LEDs.
- Buzzer sounds and Live circuit LED lights up when a threshold voltage of 50V is exceeded.
- Voltage polarity is indicated in following manner.



AC +DC -DC
+12 +12 -12

Bright LEDs and Penlight



Single-pole Phase Test

